


# #600 TRIPLE OFFSET VALVES NOW IN STOCK

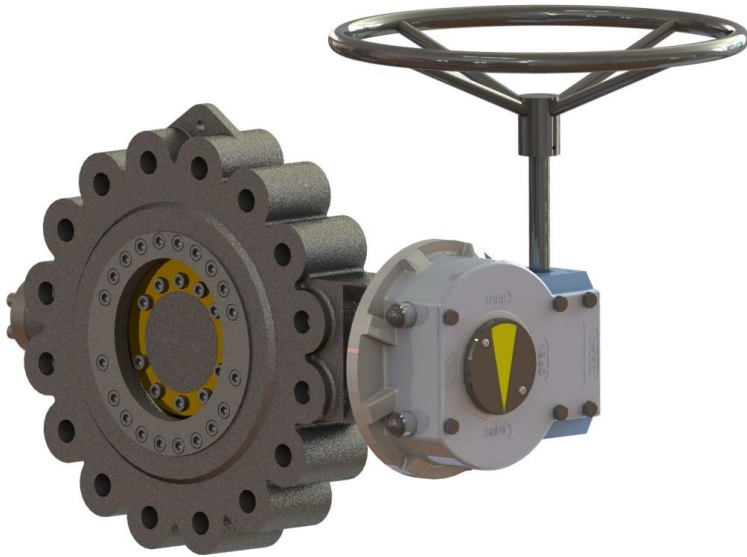

Class 600 Triple Offset Butterfly Valve

Stainless steel body and disc

Fully Lugged & Tapped

6" to 16" available now

ASME B16.5 Flange Accommodation

Face to Face to API 609 Table 2

Fire safe to API 607 6<sup>th</sup> Edition & ISO 10497

PED Compliant

NACE MR 0103 and MR 0175

Available from stock bare-shaft or with gearbox

Contact sales office for actuation options

Size (Inch)	Pressure (Lb)	TVL Product Reference
6	600	6-600 STOCK VALVE
8	600	8-600 STOCK VALVE
10	600	10-600 STOCK VALVE
12	600	12-600 STOCK VALVE
14	600	14-600 STOCK VALVE
16	600	16-600 STOCK VALVE